


MIC 30W LED FLOOD LIGHT

LIGHT THE WORLD





ITEM No.: MFL-S30-M


Electrical Specifications

- **Led Power** 30w
- **IP Grade** IP65
- **Input Voltage** AC85-265V(50-60Hz)
- **Operating Temperature** -30°C to +45°C
- **Driver Brand** CE/UL driver 
- **Power Factor (PF)** >0.95
- **Driver Efficiency** >92%
- **Certification** CE, ROHS, TUV, FCC, SAA


Photometric & Packing Specifications

- **Led Lamp** SMD 3030 
- **Lumen Output** >3900LM
- **Light Efficient** 130lm/w
- **Life span** >50000 hours
- **symmetrical** 120°*60°
- **Arm mount size** 186*193*62mm
- **Arm mount package** 41.6*43.2*31cm(16pcs/CTN)
- **Guarantee** 6 years 
- **CRI** >80
- **CCT** 2700k~6500k
- **Material** Aluminum/Optical lens
- **Weight** 0.85kg
- **'U' bracket size** 196*150*47mm
- **'U' bracket package** 34*45.2*25.8cm(16pcs/CTN)

Product size

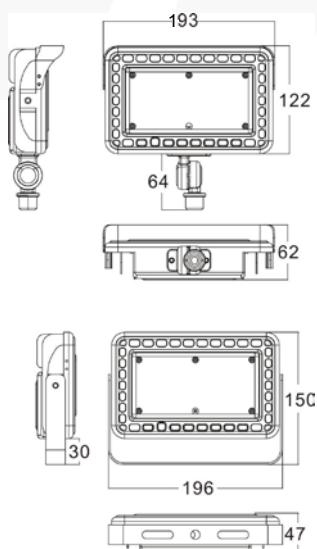


Spectrum

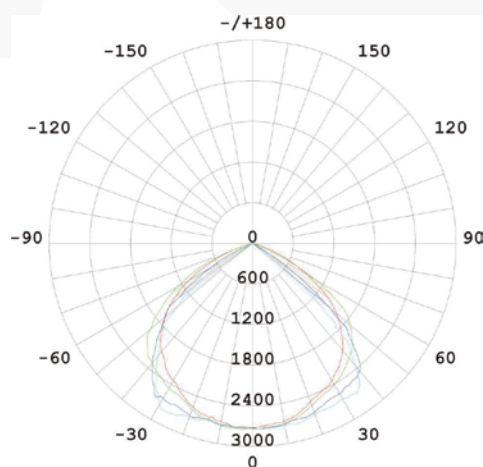

Features

1. Light weight: patented design process and heat dissipation material.
2. Multi-application: The bracket adopts thread lock, high stability, suitable for various complicated and changeable applications.
3. Multi-angle adjustable: Reasonable design facilitates adjustment of different azimuth angles.
4. High protection: The protection level reaches IP65.
5. Professional heat dissipation structure: transparent air duct design inside and outside, which greatly improves the heat dissipation performance and extends the life of the lamp.
6. Large-area die-cast aluminum housing, integrated heat dissipation.

Installation Instruction

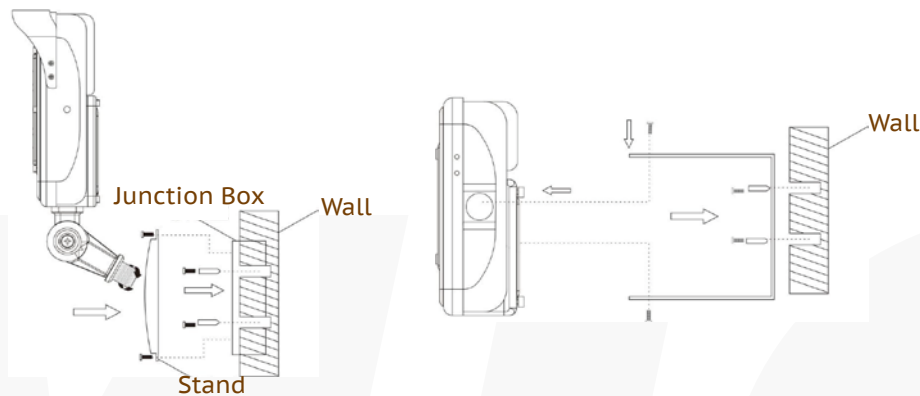

Exploded View

