


MIC 100W LED FLOOD LIGHT

LIGHT THE WORLD





ITEM No.: MFL-S100-M


Electrical Specifications

- **Led Power** 100w
- **IP Grade** IP65
- **Input Voltage** AC85-265V(50-60Hz)
- **Operating Temperature** -30°C to +45°C
- **Driver Brand** CE/UL driver 
- **Power Factor (PF)** >0.95
- **Driver Efficiency** >92%
- **Certification** CE, ROHS, TUV, FCC, SAA


Photometric & Packing Specifications

- **Led Lamp** SMD 3030 
- **Lumen Output** >13000LM
- **Light Efficient** 130lm/w
- **Life span** >50000 hours
- **symmetrical** 15° & 30° & 120°*60°
- **Arm mount size** 289*304*85mm
- **Arm mount package** 65.8*53.5*31.6cm(10pcs/CTN)
- **Guarantee** 6 years 
- **CRI** >80
- **CCT** 2700k~6500k
- **Material** Aluminum/Optical lens
- **Weight** 2.05kg
- **'U' bracket size** 239*294*60mm
- **'U' bracket package** 51*45.5*34.1cm(10pcs/CTN)

Product size

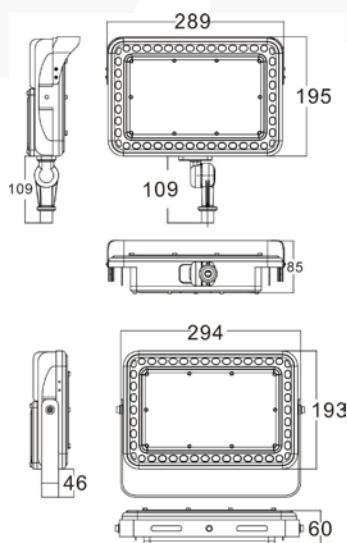


Spectrum

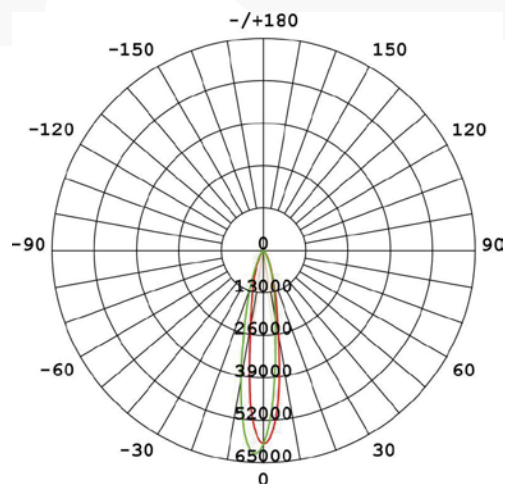

Features

1. Light weight: patented design process and heat dissipation material.
2. Multi-application: The bracket adopts thread lock, high stability, suitable for various complicated and changeable applications.
3. Multi-angle adjustable: Reasonable design facilitates adjustment of different azimuth angles.
4. High protection: The protection level reaches IP65.
5. Professional heat dissipation structure: transparent air duct design inside and outside, which greatly improves the heat dissipation performance and extends the life of the lamp.
6. Large-area die-cast aluminum housing, integrated heat dissipation.

Installation Instruction

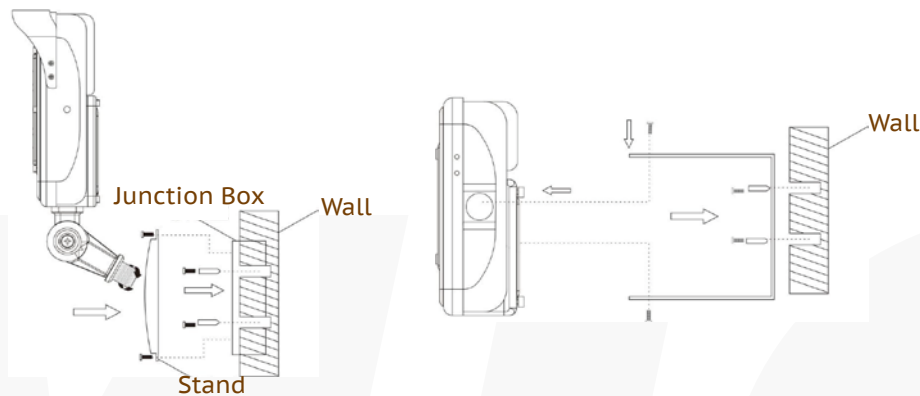

Exploded View

